

LV 6245

Stainless Steel Ball Valve – Two-Piece Male x Female


Screwed BSPP Male x Female, Full Bore, Stainless Steel Body, Ball & Stem, PTFE Seats & Seal, Anti-blowout Stem.

Pressure/Temperature Ratings

| | |
|-------------|----------------|
| Pressure | PN63 Rated |
| Temperature | -10°C to 180°C |

Material List

| No# | Part | Material |
|-----|-----------------|--------------------------------|
| 1 | Body | Stainless Steel ASTM-A351-CF8M |
| 2 | Cap | Stainless Steel ASTM-A351-CF8M |
| 3 | Ball | Stainless Steel ASTM-A351-CF8M |
| 4 | Ball Seat | 15% R-PTFE |
| 5 | Joint Gasket | PTFE |
| 6 | Stem | Stainless Steel AISI 316 |
| 7 | Thrust Washer | PTFE |
| 8 | Stem Packing | PTFE |
| 9 | Gland Nut | Stainless Steel AISI 304 |
| 10 | T-Handle | Stainless Steel AISI 304 |
| 11 | Spring Washer | Stainless Steel AISI 304 |
| 12 | Stem Nut | Stainless Steel AISI 304 |
| 13 | T-Handle Sleeve | Plastic |

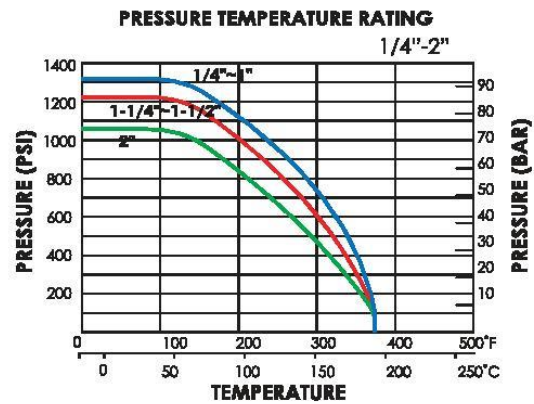

Dimensional Information on Page 2