


## REINFORCED BELLOW CUPS WITH SUPPORT

The cups described in these pages share the same features with the previously described BELLOW CUPS, only these have larger dimensions that allow them to lift much heavier loads; moreover, their anodised aluminium supports also have a central threaded hole for their fastening to the machine. The larger ones also have an additional side hole for vacuum connection. The difference is that these supports are provided with a disc instead of with a pin. These cups can be cold-assembled onto their supports with no adhesives.

For the spare part, all you have to do is request the cup indicated in the table in the desired compound.

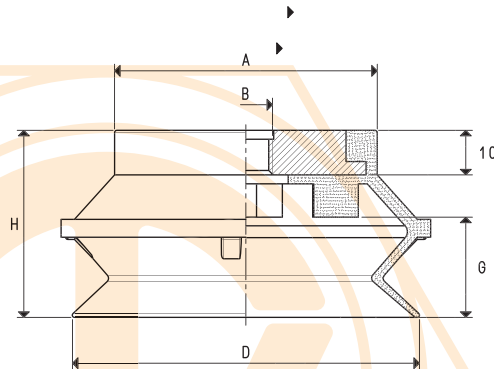

CUPS WITH SUPPORT

Art.	Force Kg	A Ø	B Ø	D Ø	G	H	Cup Art.	Support Art.	Weight g
<b>08 75 42 *</b>	11.93	59	M12	78	22.5	42	01 75 42	00 08 126	94.8
<b>08 75 42 1/2" *</b>	11.93	59	G1/2"	78	22.5	42	01 75 42	00 08 143	90.8

\* Complete the code indicating the compound: A= oil-resistant rubber; N= natural para rubber; S= silicon