


Industrial Layflat Hose

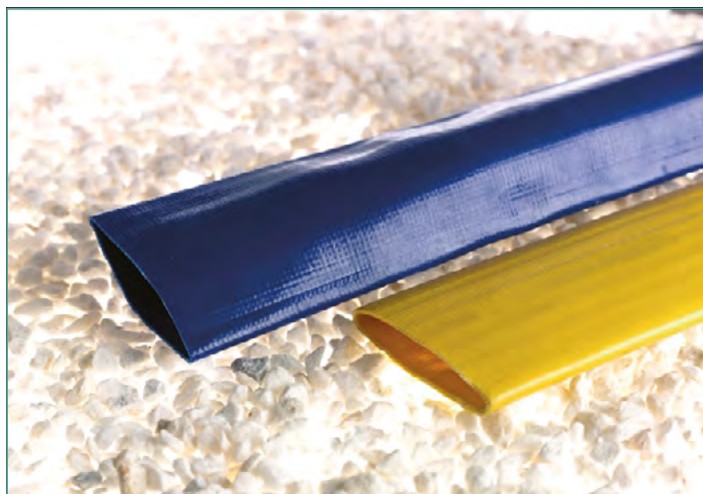

Key Features:

- Good Flexibility
- Abrasion resistant
- Minimal electrical conductivity
- Tough and durable for a longer service life
- Fast transfer of liquids

Working Temp

-20°C +60°C

Application examples:

- Drainage, water pumps, water supply, irrigation
- Sprinkler systems
- Agricultural spraying
- Construction, road works, Industry

Available Coil Lengths

100m – shorter lengths on request

LH & LHM Series

LH - Light Duty, Blue

A general purpose hose that offers exceptional value for money. For use on the discharge side of water pumps in drainage and irrigation, and for also conveying non solvent based liquids. Can be also suitable for spreading liquid fertilisers, agricultural chemicals, and some mild abrasive powders.

Easy to store and transport.

Recommended operating temperature:

-20°C to +60°C

LHM - Medium Duty, Yellow

A higher quality, medium pressure layflat hose, for conveyance of water, other liquids, fertilisers or chemicals. Also suitable for irrigation systems, sprinklers and water supply.

Easy to store and transport.

Recommended operating temperature:

-20°C to +60°C

Ref ↓	Internal Diameter	Maximum working pressure	Burst Pressure	Ex-stock
LH25	1"	6 Bar / 87 PSI	18 Bar / 261 PSI	•
LH32	1 1/4"	6 Bar / 87 PSI	18 Bar / 261 PSI	•
LH38	1 1/2"	6 Bar / 87 PSI	18 Bar / 261 PSI	•
LH52	2"	3 Bar / 43.5 PSI	9 Bar / 130.5 PSI	•
LH63	2 1/2"	3 Bar / 43.5 PSI	9 Bar / 130.5 PSI	•
LH76	3"	3 Bar / 43.5 PSI	9 Bar / 130.5 PSI	•
LH102	4"	3 Bar / 43.5 PSI	9 Bar / 130.5 PSI	•
LH152	6"	3 Bar / 43.5 PSI	9 Bar / 130.5 PSI	•

Ref ↓	Internal Diameter	Maximum working pressure	Burst Pressure	Ex-stock
LHM25	1"	6 Bar / 87 PSI	18 Bar / 261 PSI	•
LHM32	1 1/4"	6 Bar / 87 PSI	18 Bar / 261 PSI	•
LHM38	1 1/2"	6 Bar / 87 PSI	18 Bar / 261 PSI	•
LHM52	2"	6 Bar / 87 PSI	18 Bar / 261 PSI	•
LHM76	3"	6 Bar / 87 PSI	18 Bar / 261 PSI	•
LHM102	4"	6 Bar / 87 PSI	18 Bar / 261 PSI	•
LHM152	6"	6 Bar / 87 PSI	18 Bar / 261 PSI	•