


LV 2100

Lever Gate Valve

PN16
Screwed BSPP
Lever Operated
Bronze Body up to 1½"
Brass Body 2" to 6"

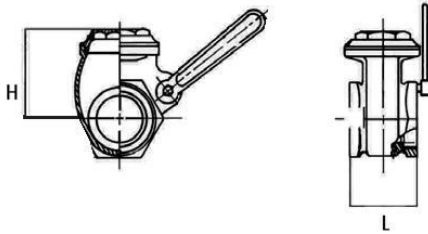

Pressure/Temperature Ratings

| | |
|--------------|---------------|
| Max Pressure | 16 Bar |
| Temperature | -20°C to 90°C |

Material List

| | |
|--------|----------------|
| Body | Bronze / Brass |
| Wedge | Brass |
| Lever | Brass |
| Washer | Brass |
| Plug | Brass |
| O-Ring | NBR |
| Gasket | Fibre |

Dimensions

| DN | Size | L | H | Kg |
|-----|------|-----|-----|------|
| 15 | ½" | 46 | 40 | 0.38 |
| 20 | ¾" | 51 | 48 | 0.55 |
| 25 | 1" | 57 | 55 | 0.76 |
| 32 | 1¼" | 61 | 62 | 1 |
| 40 | 1½" | 67 | 68 | 1.4 |
| 50 | 2" | 75 | 54 | 1.65 |
| 65 | 2½" | 80 | 106 | 3.25 |
| 80 | 3" | 86 | 117 | 3.92 |
| 100 | 4" | 92 | 150 | 5.82 |
| 150 | 6" | 102 | 230 | 11.9 |