


LV 4610

Brass Ball Valve c/w Drain Plug

Screwed BSPP Female, Full Bore, Aluminium Lever

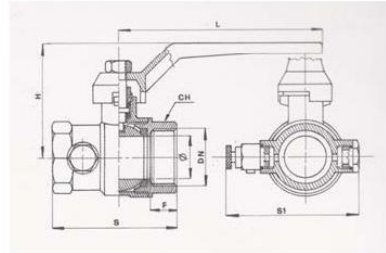

Pressure/Temperature Ratings

Max Pressure	PN20
Temperature	-15°C to 120°C

Dimensions

DN	Size	F	H	L	S	S1	CH	Kg
15	1/2"	11	50	92	54	62.5	25	0.23
20	3/4"	12	56	92	60	69.5	31	0.38
25	1"	15.5	93	115	70	76	38	0.58
32	1 1/4"	16	80.5	125	81.5	84	47	0.94
40	1 1/2"	17.5	85	150	93	94	54	1.21
50	2"	17.5	92	150	107.5	103.5	65.5	1.9

Material List

Body	Brass
Ball	Brass
Seats	PTFE
Stem	Brass
Stem O-Ring	PTFE
Stem Gasket	PTFE
Stuffing Box	Brass
Lever	Aluminium
Drain	Brass
Plug	Brass
Drain O-ring	NBR
Plug O-ring	NBR