


LV 4172

## Brass Ball Valve - NPT

**WRAS**  
WATER RESISTANT  
PRESSURE

Nickel Plated Body, Screwed NPT Female, Full Bore, PVC Coated Steel Lever

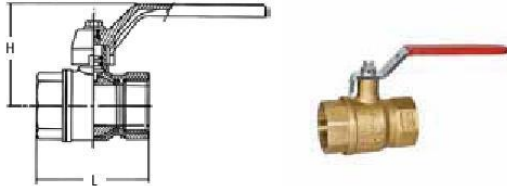

### Pressure/Temperature Ratings

|             |                |      |
|-------------|----------------|------|
| Pressure    | 1/4" to 1/2"   | PN40 |
|             | 3/4" & 1"      | PN32 |
|             | 1 1/4" to 2"   | PN25 |
|             | 3" & 4"        | PN16 |
| Temperature | -20°C to 110°C |      |

### Material List

|                  |                  |
|------------------|------------------|
| Body             | Brass            |
| Ball             | Brass            |
| Seats            | PTFE             |
| Stem             | Brass            |
| Compression Nut  | Brass            |
| Compression Cone | Brass            |
| Handle           | PVC Coated Steel |

### Dimensions

| DN  | Size   | L   | H   | Kg   |
|-----|--------|-----|-----|------|
| 8   | 1/4"   | 38  | 45  | 0.10 |
| 10  | 3/8"   | 42  | 45  | 0.12 |
| 15  | 1/2"   | 48  | 47  | 0.14 |
| 20  | 3/4"   | 57  | 53  | 0.25 |
| 25  | 1"     | 69  | 58  | 0.39 |
| 32  | 1 1/4" | 79  | 69  | 0.6  |
| 40  | 1 1/2" | 89  | 81  | 0.81 |
| 50  | 2"     | 109 | 94  | 1.35 |
| 80  | 3"     | 147 | 142 | 3.56 |
| 100 | 4"     | 177 | 160 | 5.90 |