


LV 4170

Brass Ball Valve - BSP

WRAS
WATER RESISTANT
AS BSC

Nickel Plated Body, Screwed BSPP Female, Full Bore, Aluminium Lever

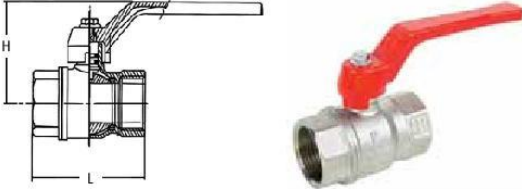

Pressure/Temperature Ratings

| | | |
|-------------|------------------|------|
| Pressure | 1/4" to 1/2" | PN40 |
| | 3/4" & 1" | PN32 |
| | 1 1/4" to 2 1/2" | PN25 |
| | 3" & 4" | PN16 |
| Temperature | -20°C to 110°C | |

Material List

| | |
|------------------|-----------|
| Body | Brass |
| Ball | Brass |
| Seats | PTFE |
| Stem | Brass |
| Compression Nut | Brass |
| Compression Cone | Brass |
| Handle | Aluminium |

Dimensions

| DN | Size | L | H | Kg |
|-----|--------|-----|-----|------|
| 8 | 1/4" | 38 | 40 | 0.10 |
| 10 | 3/8" | 42 | 48 | 0.12 |
| 15 | 1/2" | 48 | 50 | 0.14 |
| 20 | 3/4" | 57 | 57 | 0.25 |
| 25 | 1" | 69 | 60 | 0.39 |
| 32 | 1 1/4" | 75 | 73 | 0.6 |
| 40 | 1 1/2" | 89 | 86 | 0.81 |
| 50 | 2" | 105 | 98 | 1.35 |
| 65 | 2 1/2" | 126 | 110 | 2.21 |
| 80 | 3" | 147 | 148 | 3.56 |
| 100 | 4" | 177 | 167 | 5.90 |